

Order form

adaptive wheelchair AS[advanced+]

Status 2026-06 / Version 2.1



Completing the form on paper

Simply print out the order form, check the relevant component boxes to configure the product, sign the form and send it to us at: **Fax: +49 7248.9186 - 86**

Completing the form on a computer or tablet

Save the order form locally on your computer under a free selectable name and send it to **info@dietz-group.de** or print it out and fax it to: **+49 7248.9186 - 86**

✕ Fields with a blue ✕ indicate a combination or preselection

☒ Square filled selection fields indicate that these options are included in the standard.

☐ Square selection fields are not subject to any conditions and are freely selectable and deselectable.

Printing errors, mistakes and changes to prices and products reserved. © DIETZ GmbH, Karlsbad

You can find our general terms and conditions at: <https://shop.dietz-group.de/allgemeine-geschaeftsbedingungen-agb>

Details to your order:

☐ Order

☐ Offer based on selling price

☐ Offer based on purchase price

Healthcare supply store	
Customer no.	
Delivery address	
Commission	
Diagnosis	
Health insurance	
Comments	
Date, signature and Company stamp	

AS[advanced+]



Fig. with swing-away side panels in neon orange incl. armrests, Vicair Active 02 and 5" lightweight aluminum caster wheel



Fig. with side panels fixed in Alga Green, Vicair Active 02 and 6" lightweight aluminum caster wheel



Product details basic configuration

- Aluminium frame and cross strut
- Upholstered adjustable and breathable back rest (Velcro) incl. Bag
- Adjustable camber on drive 0° /1°
- Selectable with frame type S (removable leg supports) and frame type F (fixed leg supports)
- Extremely stable front wheel fittings
- Reinforced components
Backrest, rear wheel adapter, and folding stabilizer bar
- Side panels available in 5 colors
- Crash test certified according to ISO 7176-19; Approved for passenger transport in the vehicle

TECHNICAL DATA	AS[advanced+]
Colour	Frame in matt black, side panel in Black, Distant Blue, Alga Green, Ruby Red, Neon Orange
Seat width (mm)	420 - 620 in increments of 20 mm
Seat depth (mm)	360 - 600 in increments of 20 mm
Seat height, front (mm)	400 - 562,5
Seat height, rear (mm)	387,5 - 537,5
Back height (mm)	320 - 560 in increments of 20 mm
Back rest (angle)	-10 / -5 / 0 / +5 / +10
Height of push handles (mm)	726 - 1166
Overall width (mm)	Seat width + 190
Overall width when folded (mm)	280 - 330
Overall height (mm)	775 - 1075
Overall length including leg support (mm)	780 - 1236
Overall length excluding leg support (mm)	645 - 970
Steering range (mm)	1052 - 1536
Height of armrests (mm)	195 - 290
Width of armrests (mm)	51
Length of armrests (mm)	255
Lower leg length (mm)	290 - 510 in increments of 15 mm
Drive wheel (Ø inch)	22 x 1" / 24 x 1" / 26 x 1"
Castor (Ø mm/inch)	125 / 150 / 175 // 5 / 6 / 7
Tipping stability (angle)	10°
Max. load (kg)	160
Weight (kg)	from 12,5

A manufacturing tolerance of 10 mm applies to all dimensions



Price for basic configuration (EUR excl. VAT 7%)

ab 4,550.00

incl. breathable upholstered back, split legrests alu and side panel fixed mount

Key dimensions and specifications

Together with the height and weight of the user, these are the key dimensions allowing us to align the wheelchair perfectly to the needs of the user.

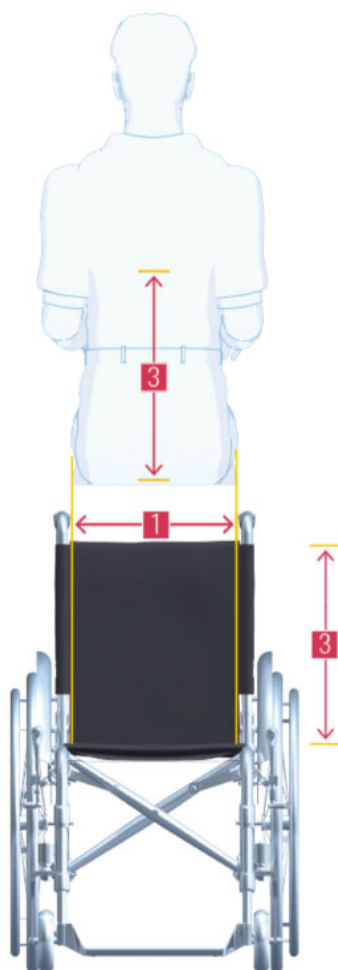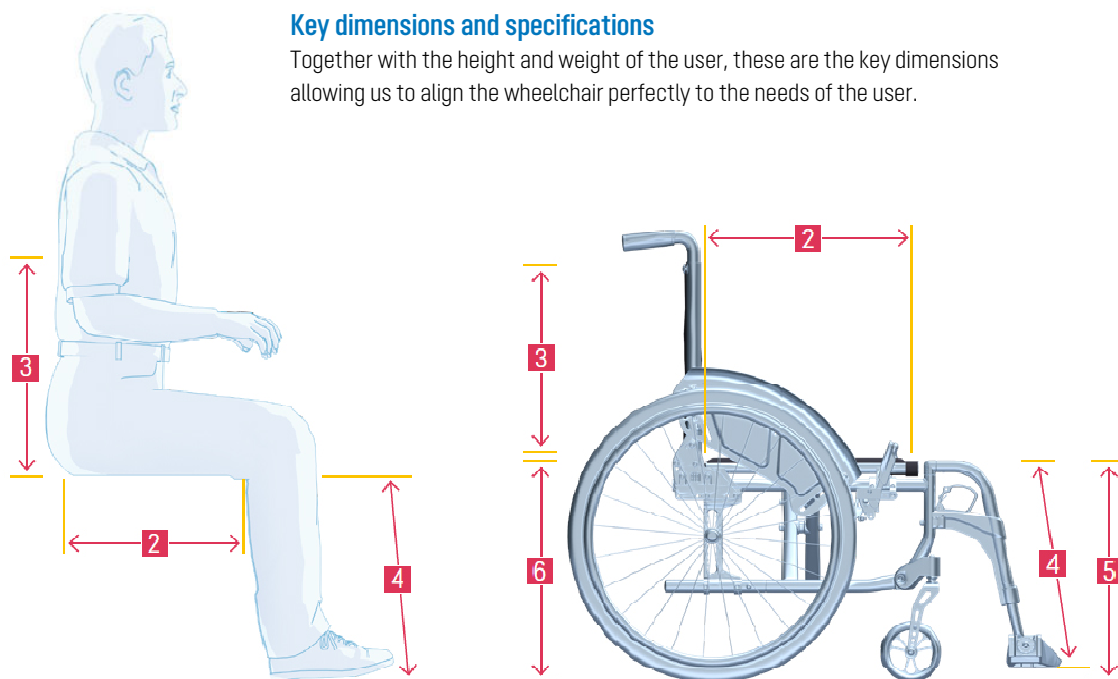

FIGURES	
	Age of customer
	Height (cm)
	Weight (kg)
1	Seat width (mm)
2	Seat depth (mm) Length of upper leg less two finger breadths
3	Height of upholstered backrest (mm)* From seat surface to below the shoulder blades
4	Lower leg length (mm) For the correct height of the foot plate
5	Seat height, front (mm)* Length of lower leg + sufficient clearance between foot plate and ground (at least 40 mm)
6	Seat height, back (mm) Depends on front seat height, seat angle and seat depth

* Measured without seat cushion. Please note the seat cushion height.

Finding the right frame type

The front frame length (1) defines the adjustment range of the knee angle. The front frame length is measured from the front edge of the seat (a) as a neutral point to the centre of the footplate (b).

The longer the front frame length, the wider the adjustment range of the knee angle. The knee angle depends on the sitting position (further back or further forward in the wheelchair) and the respective seat height. We therefore specify an angle adjustment range and not an exact knee angle.


DIETZ offers various options with removable leg supports for the AS[advanced+] adaptive wheelchairs. This allows you to find the right knee angle for your requirements.

Frame type S with fixed leg supports

Leg support, frame angle open

Front frame length*: 260 mm


Knee angle adjustment from approx. 95° - 100°

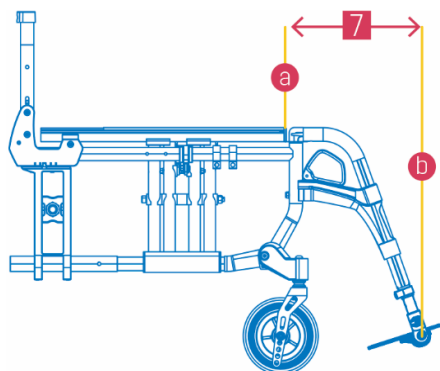

Leg support, frame angle comfort

Front frame length*: 215 mm


Knee angle adjustment from approx. 93° - 97°

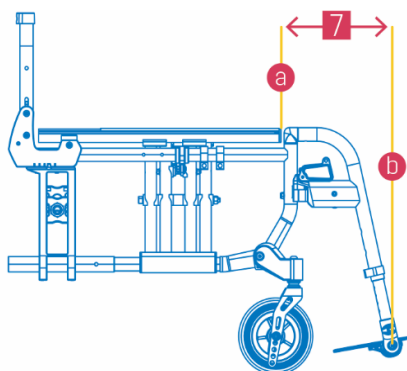

Leg support, frame angle closed

Front frame length*: 188 mm

Knee angle adjustment from approx. 90° - 95°

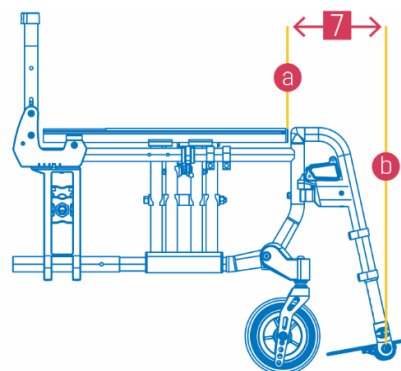


Frame type F with fixed leg supports

Leg support, frame angle comfort without frame inset

Front frame length*: 180 mm


Knee angle adjustment from approx. 95° - 100°

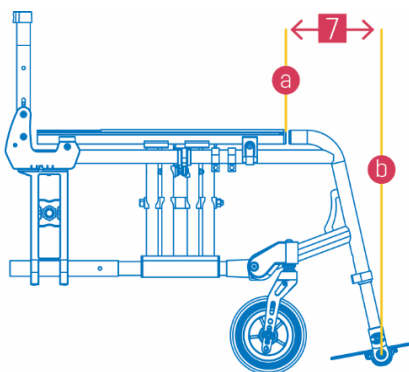

Leg support, frame angle comfort with frame inset (30 mm each side)

Front frame length*: 160 mm


Knee angle adjustment from approx. 93° - 97°

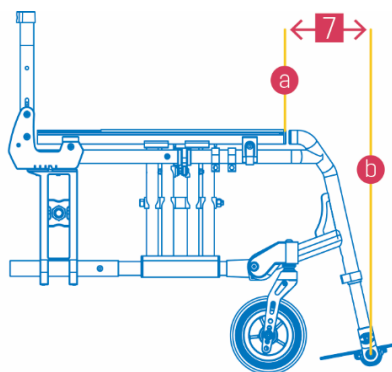

Leg support, frame angle closed with frame inset (30 mm each side)

Front frame length*: 132 mm

Knee angle adjustment from approx. 90° - 95°

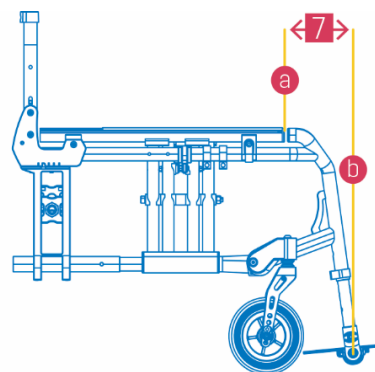

*Measured with a seat depth and height of 450 mm

Seat width/depth combinations (mm)

Seat width		420	440	460	480	500	520	540	560	580	600	620
Seat depth	360	x	x	x	x	x	x	x	x	x	x	x
	380	x	x	x	x	x	x	x	x	x	x	x
	400	x	x	x	x	x	x	x	x	x	x	x
	420	x	x	x	x	x	x	x	x	x	x	x
	440	x	x	x	x	x	x	x	x	x	x	x
	460	x	x	x	x	x	x	x	x	x	x	x
	480	x	x	x	x	x	x	x	x	x	x	x
	500	x	x	x	x	x	x	x	x	x	x	x
	520	x	x	x	x	x	x	x	x	x	x	x
	540	x	x	x	x	x	x	x	x	x	x	x
	560	x	x	x	x	x	x	x	x	x	x	x
	580	x	x	x	x	x	x	x	x	x	x	x
	600	x	x	x	x	x	x	x	x	x	x	x
Maximum load capacity 160 kg												

FRAME TYPE 7

☐	180261	AS[advanced+], max. load capacity 160 kg	4.550,00
☐	180262	Frame type S, leg supports swing-away, frame angle adjustable	0,00
☐	180263	Frame type F, fixed leg supports, without frame inset, comfort frame angle	0,00
☐	180264	Frame type F, fixed leg supports, with frame inset 30 mm, comfort frame angle	165,00
☐	180265	Frame type F, fixed leg supports, with frame inset 30 mm, closed frame angle	165,00

SEAT WIDTH (mm) 1

Seat width	420	440	460	480	500	520	540	560	580	600	620
Selection											
Item no.	180333	180334	180335	180336	180337	180338	180339	180327	180328	180329	180330

SEAT DEPTH (mm) 2


Seat depth	360	380	400	420	440	460	480	500	520	540	560	580	600
Selection													
Item no.	180314	180315	180316	180317	180318	180319	180320	180321	180322	180323	180324	180325	180326
Prices	0,00											276,00	

FRONT SEAT HEIGHT **5**

Front seat height (mm) and castor diameter (mm/inches)

Adjustable in 12.5 mm increments

- s x** Front seat height is mounted with short (s) wheel forks and hole (x).
Fork length = 126 mm / Fork width inside = 46 mm
- l x** Front seat height is mounted with long (l) wheel forks and hole (x).
Fork length = 164 mm / Fork width inside = 46 mm

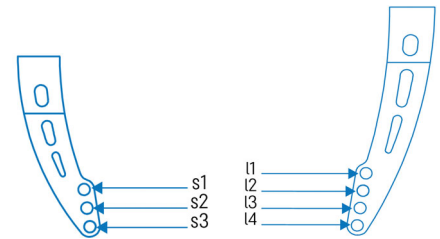

Front seat height	400	412,5	425	437,5	450	462,5	475	487,5	500	512,5	525	537,5	550	562,5
125 mm/ 5"	k 1	k 2	k 3	l 2	k 1	k 2	k 3	l 2	l 3	l 4	l 3	l 4		
150 mm/ 6"			k 2	k 3	l 2	l 3	k 2	k 3	l 2	l 3	l 4	l 3	l 4	
175mm/ 7"					l 1	l 2	l 3	l 4	l 1	l 2	l 3	l 4	l 3	l 4

The front seat height, depends on the wheel size.

Note: The values shown are for reference only and are based on measurements taken at 0° seat tilt without a seat cushion.

Front seat height

Front seat height	400	412,5	425	437,5	450	462,5	475	487,5	500	512,5	525	537,5	550	562,5
Selection														
Item no.	181101	181133	181134	181135	181136	181137	181138	181139	181309	181310	181311	181112	181113	181132
Prices	0,00												219,00	

ATTENTION: The permissible seat height difference between the front seat height and rear is max. 100 mm.

CASTORS

Castor wheel 5" / 125 mm

☐ 182293	PU tyre softroll, plastic rim, black	width 40 mm	0,00
☐ 182288	Easy-running tyre, plastic rim, black	width 34 mm	0,00
☐ 182291	Easy-running tyre, alu rim, black	width 34 mm	149,00

Castor wheel 6" / 150 mm

☐ 182294	PU tyre softroll, plastic wheel rims, black	width 27 mm	0,00
☐ 182289	Easy-running tyre, plastic rim, black	width 34 mm	0,00
☐ 182292	Easy-running tyre, alu rim, black	width 34 mm	149,00

Castor wheel 7" / 175 mm

☐ 182295	PU tyre softroll, plastic wheel rims, black	width 40 mm	0,00
---------------------------------	---	-------------	------

REAR SEAT HEIGHT **6**

Rear Seat height (mm) and drive wheel height (inches)

Adjustable in 12.5 mm increments with no extra mounting materials

Rear seat height	387,5	400	412,5	425	437,5	450	462,5	475	487,5	500	512,5	525	537,5
22"	x	x	x	x	x	x	x	x	x				
24"			x	x	x	x	x	x	x	x	x		
26"						x	x	x	x	x	x	x	x

The rear seat height must not be higher than the front seat height.

Note: The values provided are for reference only and are based on measurements taken at 0° seat tilt without a seat cushion.

Rear seat height

Rear seat height	387,5	400	412,5	425	437,5	450	462,5	475	487,5	500	512,5	525	537,5
Selection													
Item no.	181312	181313	181314	181315	181316	181317	181318	181319	181320	181321	181322	181323	181131

WARNING: The maximum permissible seat height difference between the front and rear seat height is 100 mm.

Item No.	Description	Price (€) excl. VAT
DRIVE WHEEL		
Drive wheels 22"		
☐ 181296	Standard rim, aluminum hub black, tangential spokes silver	0,00
☐ 181344	Design rim, aluminum hub, radial spokes, black	max. user weight 130 kg 185,00
☐ 181299	Standard rim, drum brake, aluminum hub black, tangential spokes silver	only with curved, height-adjustable push handles 347,00
Drive wheels 24"		
☐ 181297	Standard rim, aluminum hub black, tangential spokes silver	0,00
☐ 181340	Design rim, aluminum hub, radial spokes, black	max. user weight 130 kg 185,00
☐ 181337	Spinergy SLX rim, spokes 24 pcs., black	949,00
☐ 181342	Spinergy Spox rim, spokes 18 pcs., black	max. user weight 130 kg 695,00
☐ 181343	Spinergy LX rim, spokes 12 pcs., black	max. user weight 120 kg 906,00
☐ 181300	Standard rim, drum brake, aluminum hub black, tangential spokes silver	only with curved, height-adjustable push handles 347,00
Not possible with one-hand drive		
Drive wheels 26"		
☐ 181298	Standard rim, aluminum hub black, tangential spokes silver	0,00
☐ 181341	Design rim, aluminum hub, radial spokes, black	max. user weight 130 kg 185,00
☐ 181301	Standard rim, drum brake, aluminum hub black, tangential spokes silver	only with curved, height-adjustable push handles 347,00
One-hand drive 24", max. user weight 140 kg		
☐ 181345	One-hand drive 24", drive wheels PU	left 995,00
☐ 181346	One-hand drive 24", drive wheels PU	right 995,00
☐ 181347	One-hand drive 24", drive wheels air tires, standard, black	left 995,00
☐ 181348	One-hand drive 24", drive wheels air tires, standard, black	right 995,00
Not possible in combination with caster angle 1° and drum brake and Pushrims TETRA-GRIPP, ERGO-GRIPP, CURVE L TETRA-GRIPP, GEKKO. Overall width with one hand drive = +40 mm. Recommended with one-hand brake.		
Tires		
☐ 181162	PU tires, fine tread, puncture-proof, black	0,00
☐ 181164	Air tires, Marathon Plus, including puncture protection, black	79,00
Pushrims		
☐ 181166	Pushrims aluminum, black anodized	0,00
☐ 181167	Pushrims steel, polished	0,00
☐ 181168	Pushrims titanium	229,00
☐ 181306	24" TETRA-GRIPP pushrims, black	Special coated pushrims, full hand function with reduced hand strength or limited hand function 427,00
☐ 181169	24" CURVE L TETRA-GRIPP pushrims, black	Special coated pushrims with wide contact surface, full hand function with reduced hand strength or limited hand function 457,00
☐ 181307	24" ERGO-GRIPP pushrims, black anodized	Ergonomic pushrims with integrated rubber lip across the width, full hand function from full hand strength to reduced hand strength 427,00
☐ 181170	24" GEKKO pushrims, black anodized	Ergonomic pushrims with integrated rubber lip, full hand function from full hand strength to reduced hand strength 457,00
Overall width with TETRA-GRIPP, CURVE L TETRA-GRIPP, ERGO-GRIPP, and GEKKO = + 40 mm. Not possible in combination with one-hand drive.		
Pushrim mounting		
☐ 181223	Narrow mounting 10 mm	0,00
☐ 181224	Wide mounting 20 mm	0,00
Not possible in combination with one-hand drive.		

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------

DRIVE WHEEL

Pushrim cover

☐	181349	Pushrim cover smooth, silicon, black	pair	135,00
Not possible with special pushrims TETRA-GRIPP, CURVE L TETRA-GRIPP, ERGO-GRIPP and GEKKO.				


Spoke guard

☐	181225	Spoke guard, transparent	pair	190,00
Not possible with Spinergy SLX, LX and Spox rim.				

Camber

☐	181158	Camber 0°		0,00
☐	181159	Camber 1°	not possible with drum brake	0,00
Overall width with caster angle 1° = +20 mm				

☐	181157	+40 mm with wheelbase extension		0,00
☐	181222	+30 mm with wheelbase extension		0,00
☐	181149	+ 20 mm		0,00
☐	181221	+ 10 mm		0,00
☐	181150	0 mm		0,00
☐	181151	- 10 mm		0,00
☐	181152	- 20 mm		0,00
☐	181153	- 30 mm		0,00
☐	181154	- 40 mm	not possible with seat depth 360 mm	Anti-tip wheels recommended
☐	181155	- 50 mm	not possible with seat depth 360 mm	Anti-tip wheels recommended
☐	181156	- 60 mm	not possible with seat depth 360 mm	Anti-tip wheels recommended

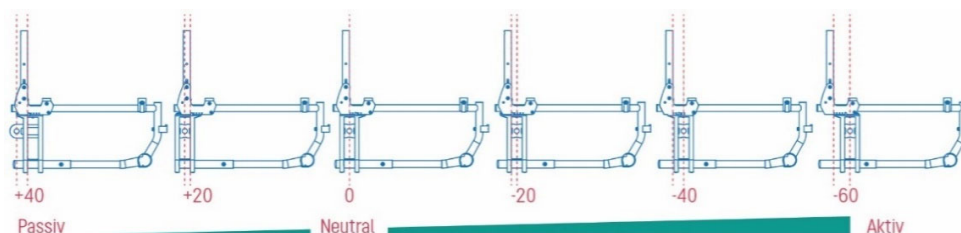

FRAME ACCESSORIES

☐	181227	Long pelvic belt (length 1500 mm)		38,00
☐	181308	Hemi Kit, Spacer Block: Steering wheels 30mm exposed for more foot clearance		367,00
☐	181171	Anti-tipping, swivel-off wheel	left	169,00
☐	181172	Anti-tipping, swivel-off wheel	right	169,00
☐	181173	Foot tube	left	63,00
☐	181174	Foot tube	right	63,00
☐	181294	Cane holder (only in conjunction with foot tube)	left	39,00
☐	181295	Cane holder (only in conjunction with foot tube)	right	39,00

The anti-tip wheel and the foot tube cannot be mounted on the same side.

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------

SEAT

☐	181202	seat upholstery incl. utility bag	bag dimensions:(L x W x H: 220 x 120 x 30 mm)	0,00
☐	181203	Without seat upholstery		0,00

Seat cushion

☐	181228	Wheelchair cushion standard	height 60 mm	99,00
--------------------------	--------	-----------------------------	--------------	-------

Anti-decubitus seat cushion Vicair Active O2

Seat width (mm) selection with seat depth (mm)

☒	Standard sizes / height: 60 oder 90 mm
☒	Custom sizes / prices and delivery times upon request
☒	Standard sizes / height: 90 mm

Seat width		460	480	500	520	540	560	580	600
Seat depth	360	☒	☒	☒	☒	☒	☒	☒	☒
	380	☒	☒	☒	☒	☒	☒	☒	☒
	400	☒	☒	☒	☒	☒	☒	☒	☒
	420	☒	☒	☒	☒	☒	☒	☒	☒
	440	☒	☒	☒	☒	☒	☒	☒	☒
	460	☒	☒	☒	☒	☒	☒	☒	☒
	480	☒	☒	☒	☒	☒	☒	☒	☒
	500	☒	☒	☒	☒	☒	☒	☒	☒
	520	☒	☒	☒	☒	☒	☒	☒	☒
	540	☒	☒	☒	☒	☒	☒	☒	☒
	560	☒	☒	☒	☒	☒	☒	☒	☒
	580	☒	☒	☒	☒	☒	☒	☒	☒
	600	☒	☒	☒	☒	☒	☒	☒	☒

☐	181332	Vicair Active O2 cushion height 60 mm	HMV 11.39.05.1009	750,00
☐	181333	Vicair Active O2 cushion height 90 mm	HMV 11.39.05.1008	750,00

Cannot be combined with seat width 620 mm.

BACKREST 3

Back height

☐	181175	320 mm	+ 40 mm adjustable	not with lumbar bend	0,00
☐	181176	340 mm	± 20 mm adjustable	not with lumbar bend	0,00
☐	181177	360 mm	± 20 mm adjustable	with lumbar bend, not adjustable by +/- 20 mm	0,00
☐	181178	380 mm	± 20 mm adjustable	with lumbar bend, not adjustable by +/- 20 mm	0,00
☐	181179	400 mm	± 20 mm adjustable		0,00
☐	181180	420 mm	± 20 mm adjustable		0,00
☐	181181	440 mm	± 20 mm adjustable		0,00
☐	181182	460 mm	± 20 mm adjustable		0,00
☐	181183	480 mm	± 20 mm adjustable		0,00
☐	181184	500 mm	± 20 mm adjustable		0,00
☐	181185	520 mm	± 20 mm adjustable		0,00
☐	181186	540 mm	± 20 mm adjustable		0,00
☐	181187	560 mm	- 40 mm adjustable		0,00

Back height adjustment (+40, ± 20 mm, -40 mm) is not available with curved push handles or curved, height-adjustable push handles.

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------

BACKREST 3

Back tube

☐	181188	Straight fix, not angle-adjustable 0°	measured at 90° to the seat angle	0,00
☐	181189	Lumbar bend (+7,5°)	measured at 90° to the seat angle	78,00

Back angle

☐	181339	Fixed angle 0°, not angle-adjustable	measured at 90° to the seat angle	0,00
☐	181190	Fixed angle -10°, angle-adjustable	measured to the seat angle	287,00
☐	181191	Fixed angle -5°, angle-adjustable	measured to the seat angle	287,00
☐	181192	Fixed angle 0°, angle-adjustable	measured to the seat angle	287,00
☐	181193	Fixed angle +5°, angle-adjustable	measured to the seat angle	287,00
☐	181194	Fixed angle +10°, angle-adjustable	measured to the seat angle	287,00

0° corresponds to an angle of 90°. Negative angles are < 90°, and positive angles are > 90°.

Recommendation: From an angle of +10°, use with anti-tip wheels.


Back upholstery

☐	181196	Adjustable, breathable back upholstery with integrated pocket (W x H: 260 x 220 mm), black	0,00
☐	181229	Back upholstery increased by 20 mm in width , breathable back upholstery with integrated pocket (W x H: 260 x 220 mm), black	0,00
		not compatible with SW 620 mm	
☐	181230	Back upholstery increased by 40 mm in width , breathable back upholstery with integrated pocket (W x H: 260 x 220 mm), black	0,00
		not compatible with SW 600 und 620 mm	
☐	181197	Without back upholstery	0,00


Push handles

☐	181198	Push handles standard	not compatible with drum brake	0,00
☐	181199	Push handles curved		0,00
☐	181200	Push handles curved, height-adjustable (+100 mm)	not with back height 500–560 mm and lumbar bend	283,00


Back height adjustment (+40, ± 20 mm, -40 mm) is not available with curved push handles or curved, height-adjustable push handles.



Push handles
standard



Push handles curved




Push handles curved,
height-adjustable

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------


SIDE PANEL

☐	181273	Side panel with aluminum wheel cover incl. cold protection, fixed mount	95,00
☐	181206	Side panel with aluminum wheel cover incl. cold protection, fixed mount, height-adjustable armrests (PU)	217,00
☐	181207	Side panel with aluminum wheel cover incl. cold protection, swing-away to the rear and removable, height-adjustable armrests (PU)	340,00


Overall width with side panel, swing-away = +50 mm. Overall width with fixed or plug-in side panel with armrests = +40 mm.



Side panel solid,
aluminium



Side panel solid,
aluminium,
arm rests (PU)



Side panel, aluminium, swing
away and removable, arm
rests (PU)

Colour side panel

☐	181210	Black	0,00	
☐	181211	Distant Blue	0,00	
☐	181212	Alga Green	0,00	
☐	181213	Ruby Red	0,00	
☐	181214	Neon Orange	0,00	
☐	181285	Side panel in your colour of choice	RAL colour	278,00



Black



Distant Blue



Alga Green



Ruby Red



Neon Orange



RAL color of choice

☐	181215	Armrest standard, continuously depth-adjustable, PU black	(L x B) 255 x 51 mm	0,00
☐	181216	Armrest, depth-adjustable in 3 steps from 34 mm (tool-free), PU black	(L x B) 255 x 51 mm	120,00

ACCESSORIES WHEEL GUARDS

☐	181274	HEMI arm pads, handpiece flat left, PU, 360° rotatable	(L) 465 mm	436,00
☐	181275	HEMI arm pads, handpiece flat right, PU, 360° rotatable	(L) 465 mm	436,00
☐	181276	HEMI arm pads, handpiece ergonomic left, PU, 360° rotatable	(L) 477 mm	464,00
☐	181277	HEMI arm pads, handpiece ergonomic right, PU, 360° rotatable	(L) 477 mm	464,00
☐	181278	Extension PU, forearm shell	(L) 70 mm	80,00



HEMI armrest, handpiece flat



HEMI armrest, handpiece ergonomic



Extension

☐	181270	Therapy tray, SW 400 - 460 mm	W x D: 600 x 570 mm	270,00
☐	181271	Therapy tray, SW 480 - 540 mm	W x D: 675 x 570	291,00
☐	181266	Therapy table, half table folding	left	243,00
☐	181272	Therapy table, half table folding	right	243,00

Not possible with the side panel without armrests and HEMI arm pads

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------


LEG SUPPORT **4 7**

Leg Support Hangers


Frame angle and length of lower leg (III)

☐ 181217	Leg support hangers, frame angle open, alu/plastic, pair	Frame angle (knee angle 110°-115°), Ul 370 – 510 mm	0,00
☐ 181328	Leg support hangers, frame angle comfort, alu, pair	Frame angle (knee angle 100°-105°), Ul 370 - 510 mm	0,00
☐ 181329	Leg support hangers, frame angle closed, alu , Pair	Frame angle (knee angle 90°-95°), Ul 370 – 510 mm	0,00

The lower leg lengths 330 to 470 mm and 290 to 390 mm cannot be selected for the open leg support. The upper parts of the leg supports cannot be combined with frame type F with fixed leg supports. Leg supports with a closed frame angle cannot be combined with 6" or 7" castor wheels.



Leg support open



Leg support comfort



Leg support, closed



Lower leg support length

☐ 182297	Standard lower leg length 370 – 510 mm		0,00
☐ 181326	Shortened lower leg length 330 – 470 mm	not possible with the leg support, frame angle open	0,00
☐ 181327	Shortened lower leg length 290 – 390 mm	not possible with frame type F, fixed leg supports and with the leg support, frame angle open	0,00

Foot plates

☐ 181269	Foot plates, divided, aluminium black, pair	fold-up design, adjustable angle, with heel strap	0,00
☐ 181330	Foot plates, continuous, aluminium black	folds up to the left, adjustable angle, with calf strap	0,00
☐ 181331	Foot plates, continuous, aluminium black	folds up to the right, adjustable angle, with calf strap	0,00


The Foot plates continuous can only be combined without frame retraction up to SB 520 mm and with frame retraction up to SB 580 mm.

Foot plates, divided, alu,
fold-up designFoot plates, continuous,
alu, fold-up design


Elevating legrest and amputees support

☐ 181281	Elevating legrest, adjustable horizontally with gas spring	right	197,00
☐ 181282	Elevating legrest, adjustable horizontally with gas spring	left	197,00
☐ 181283	Amputees support, adjustable angle	right	187,00
☐ 181284	Amputees support, adjustable angle	left	187,00

Not possible with frame type F, frames with fixed leg support



Leg support, adjustable horizontally



Leg support for amputees

BRAKE

☐ 182218	Parking brake standard, push-to-lock	pair	0,00
☐ 182216	Parking brake, pull-to-lock	pair	49,00
☐ 181287	One-hand brake system, incl. 110 mm fold-out brake lever extension	right	272,00
☐ 181286	One-hand brake system, incl. 110 mm fold-out brake lever extension	left	272,00
☐ 181288	Brake lever extension, 110 mm fold-out	pair	49,00



Productgroup: adaptive wheelchair
Product: AS[advanced+]

DIETZ GmbH
Reutäckerstraße 12
76307 Karlsbad
info@dietz-group.de
www.dietz-group.de