

Order form

adaptive wheelchair AS[advanced]

Status 2026-01 / Version 2.1



Completing the form on paper

Simply print out the order form, check the relevant component boxes to configure the product, sign the form and send it to us at: **Fax: +49 7248.9186 - 86**

Completing the form on a computer or tablet

Save the order form locally on your computer under a free selectable name and send it to **info@dietz-group.de** or print it out and fax it to: **+49 7248.9186 - 86**

✕ Fields with a blue ✕ indicate a combination or preselection

☒ Square filled selection fields indicate that these options are included in the standard.

☐ Square selection fields are not subject to any conditions and are freely selectable and deselectable.

Printing errors, mistakes and changes to prices and products reserved. © DIETZ GmbH, Karlsbad

You can find our general terms and conditions at: <https://shop.dietz-group.de/allgemeine-geschaeftsbedingungen-agb>

Details to your order:

☐ Order

☐ Offer based on selling price

☐ Offer based on purchase price

Healthcare supply store	
Customer no.	
Delivery address	
Commission	
Diagnosis	
Health insurance	
Comments	
Date, signature and Company stamp	

AS(advanced)



Fig. with plug-in side panels fixed, Vicair Active 02
and 5" lightweight aluminum caster wheel



Fig. with one-piece aluminum footplate, Vicair Active 02
and 4" lightweight aluminum caster wheel



TECHNICAL DATA	AS[advanced]
Colour	Frame in matt black, side panel in Black, Distant Blue, Alga Green, Ruby Red, Neon Orange
Seat width (mm)	340 – 520 in increments of 20 mm
Seat depth (mm)	360 – 540 in increments of 20 mm
Seat height, front (mm)	387,5 – 562,5
Seat height, rear (mm)	387,5 – 537,5
Back height (mm)	320– 500 in increments of 20 mm
Back rest (angle)	fixed : -10 / -5 / 0 / +5 / +10 // adjustable: -10 / 0 / +10 / +20 / +30
Height of push handles (mm)	726 - 1106
Overall width (mm)	Seat width + 190
Overall width when folded (mm)	280 - 330
Overall height (mm)	775 - 1015
Overall length including leg support (mm)	780 - 1196
Overall lenght excluding leg support (mm)	645 - 930
Steering range (mm)	1014 - 1458
Height of armrests (mm)	195 - 290
Width of armrests (mm)	51
Length of armrests (mm)	255
Lower leg length (mm)	290 – 510 in increments of 15 mm
Drive wheel (Ø inch)	22 x 1" / 24 x 1" / 26 x 1"
Castor (Ø mm/inch)	100/125 / 150 / 175 // 4/ 5 / 6 / 7
Tipping stability (angle)	10°
Max. load (kg)	125
Weight (kg)	from 10,7

A manufacturing tolerance of 10 mm applies to all dimensions

Product details basic configuration

- Aluminium frame and cross strut
- Upholstered adjustable and breathable back rest (Velcro)
- Adjustable camber on drive 0° /1° /2° / 3°
- Selectable with frame type S (removable leg supports) and frame type F (fixed leg supports)
- Extremely stable front wheel fittings
- Multiple adjustment options without the need for additional components, such as front/rear seat height, backrest angle, and backrest height
- Crash test certified according to ISO 7176-19; Approved for passenger transport in the vehicle



Price for basic configuration (EUR excl. VAT 7%)

ab 2.450

incl. breathable upholstered back and split legrests plastic

Key dimensions and specifications

Together with the height and weight of the user, these are the key dimensions allowing us to align the wheelchair perfectly to the needs of the user.

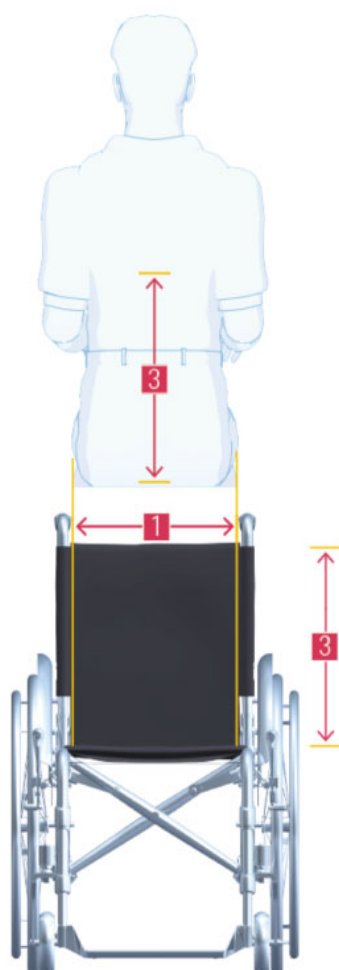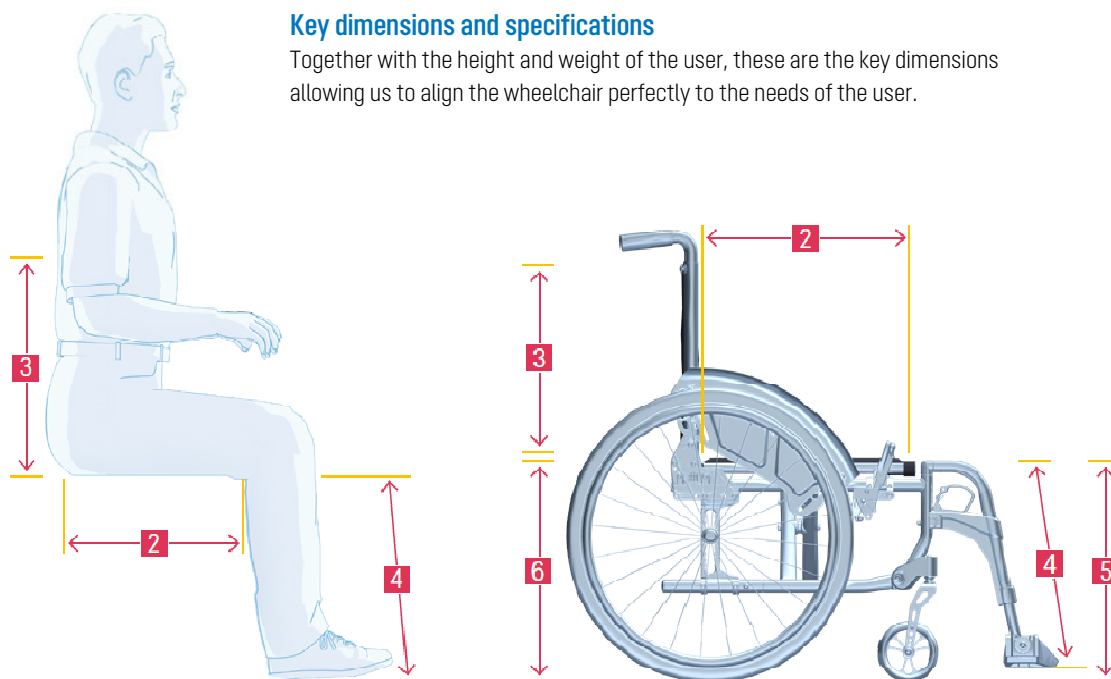

FIGURES	
	Age of customer
	Height (cm)
	Weight (kg)
1	Seat width (mm)
2	Seat depth (mm) Length of upper leg less two finger breadths
3	Height of upholstered backrest (mm)* From seat surface to below the shoulder blades
4	Lower leg length (mm) For the correct height of the foot plate
5	Seat height, front (mm)* Length of lower leg + sufficient clearance between foot plate and ground (at least 40 mm)
6	Seat height, back (mm) Depends on front seat height, seat angle and seat depth

* Measured without seat cushion. Please note the seat cushion height.

Finding the right frame type

The front frame length (1) defines the adjustment range of the knee angle. The front frame length is measured from the front edge of the seat (a) as a neutral point to the centre of the footplate (b).

The longer the front frame length, the wider the adjustment range of the knee angle. The knee angle depends on the sitting position (further back or further forward in the wheelchair) and the respective seat height. We therefore specify an angle adjustment range and not an exact knee angle.


DIETZ offers various options with removable leg supports for the AS[advanced] adaptive wheelchairs. This allows you to find the right knee angle for your requirements.

Frame type S with fixed leg supports

Leg support, frame angle open

Front frame length*: 260 mm


Knee angle adjustment from approx. 95° - 100°

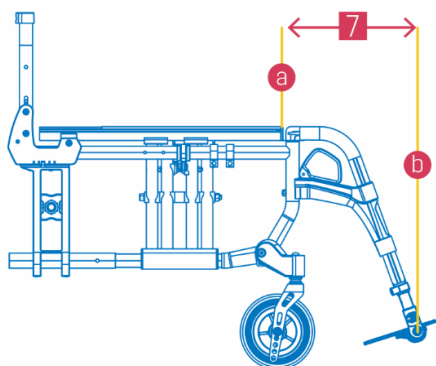

Leg support, frame angle comfort

Front frame length*: 215 mm


Knee angle adjustment from approx. 93° - 97°

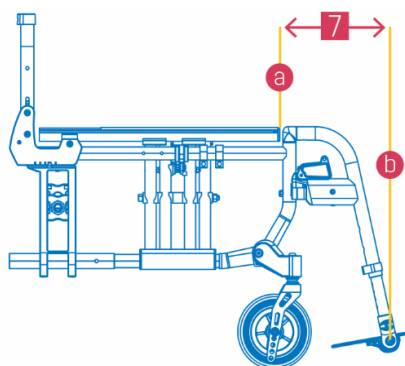

Leg support, frame angle closed

Front frame length*: 188 mm

Knee angle adjustment from approx. 90° - 95°

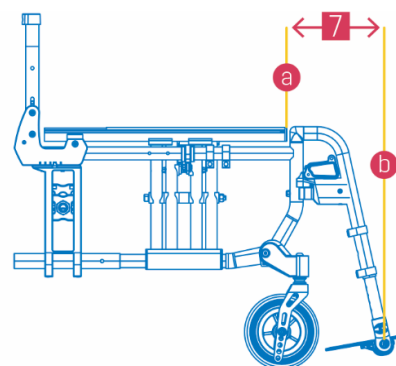


Frame type F with fixed leg supports

Leg support, frame angle comfort

without frame inset

Front frame length*: 180 mm

Knee angle adjustment from approx. 95° - 100°

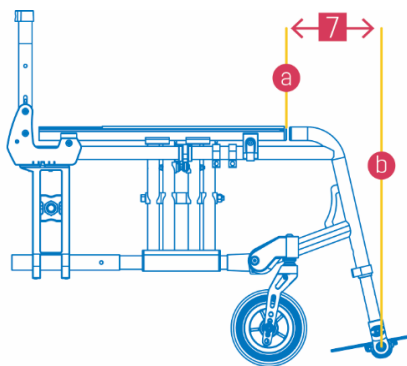


Leg support, frame angle comfort

with frame inset (30 mm each side)

Front frame length*: 160 mm

Knee angle adjustment from approx. 93° - 97°

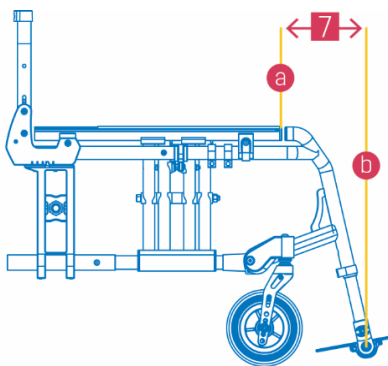


Leg support, frame angle closed

with frame inset (30 mm each side)

Front frame length*: 132 mm

Knee angle adjustment from approx. 90° - 95°

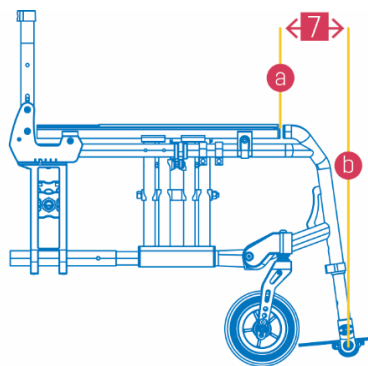

*Measured with a seat depth and height of 450 mm

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------

Seat width/depth combinations (mm)

Seat depth	Seat width	340	360	380	400	420	440	460	480	500	520
	360	x	x	x	x	x	x	x	x	x	x
	380	x	x	x	x	x	x	x	x	x	x
	400	x	x	x	x	x	x	x	x	x	x
	420	x	x	x	x	x	x	x	x	x	x
	440	x	x	x	x	x	x	x	x	x	x
	460	x	x	x	x	x	x	x	x	x	x
	480	x	x	x	x	x	x	x	x	x	x
	500	x	x	x	x	x	x	x	x	x	x
	520	x	x	x	x	x	x	x	x	x	x
	540	x	x	x	x	x	x	x	x	x	x
Maximum load capacity 125 kg											

FRAME TYPE 7

☐ 180260	AS[Advanced] , max. load capacity 125 kg	2.450,00
☐ 180262	Frame type S , leg supports swing-away, frame angle adjustable	0,00
☐ 180263	Frame type F , fixed leg supports, without frame inset, comfort frame angle	0,00
☐ 180264	Frame type F , fixed leg supports, with frame inset 30 mm, comfort frame angle	165,00
☐ 180265	Frame type F , fixed leg supports, with frame inset 30 mm, closed frame angle	165,00

SEAT WIDTH (mm) 1

Seat width	340	360	380	400	420	440	460	480	500	520
Selection										
Item no.	180340	180341	180331	180332	180333	180334	180335	180336	180337	180338

Seat width 340/360 mm not available for frame type F, with 30 mm frame inset

SEAT DEPTH (mm) 2

Seat depth	360	380	400	420	440	460	480	500	520	540
Selection										
Item no.	180314	180315	180316	180317	180318	180319	180320	180321	180322	180323

FRONT SEAT HEIGHT **5**

Front seat height (mm) and castor diameter (mm/inches)

Adjustable in 12.5 mm increments

s x


Front seat height is mounted with short (s) wheel forks and hole (x).

Fork length = 126 mm / Fork width inside = 46 mm

l x

Front Seat height is mounted with long (l) wheel forks and hole (x).

Fork length = 164 mm / Fork width inside = 46 mm

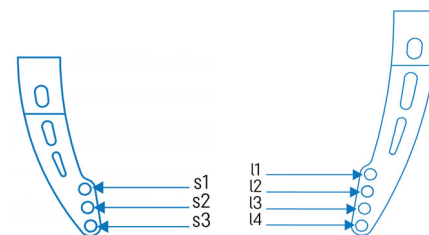

Front seat height		387,5	400	412,5	425	437,5	450	462,5	475	487,5	500	512,5	525	537,5	550,0	562,5
Castors	100 mm/ 4"	s 1	s 2	s 3	l 2	s 1	s 2	s 3	l 2	l 3	l 4	l 3	l 4			
	125 mm/ 5"		s 1	s 2	s 3	l 2	s 1	s 2	s 3	l 2	l 3	l 4	l 3	l 4		
	150 mm/ 6"				s 2	s 3	l 2	l 3	s 2	s 3	l 2	l 3	l 4	l 3	l 4	
	175mm/ 7"						l 1	l 2	l 3	l 4	l 1	l 2	l 3	l 4	l 3	l 4

The front seat height, depends on the wheel size.

Note: The values shown are for reference only and are based on measurements taken at 0° seat tilt without a seat cushion.

Front seat height

Front seat height	387,5	400	412,5	425	437,5	450	462,5	475	487,5	500	512,5	525	537,5	550,0	562,5
Selection															
Item no.	181100	181101	181133	181134	181135	181136	181137	181138	181139	181309	181310	181311	181112	181113	181132
Prices	0,00													219,00	

ATTENTION: The permissible seat height difference between the front seat height and rear is max. 100 mm.

CASTORS

Castor wheel 4" / 100 mm

☐ 182287	Easy-running tyre, plastic rim, black	width 34 mm	0,00
☐ 182290	Easy-running tyre, alu rim, black	width 34 mm	149,00

Castor wheel 5" / 125 mm

☐ 182293	PU tyre softroll, plastic rim, black	width 27 mm	0,00
☐ 182288	Easy-running tyre, plastic rim, black	width 34 mm	0,00
☐ 182291	Easy-running tyre, alu rim, black	width 34 mm	149,00

Castor wheel 6" / 150 mm

☐ 182294	PU tyre softroll, plastic rim, black	width 40 mm	0,00
☐ 182289	Easy-running tyre, plastic rim, black	width 34 mm	0,00
☐ 182292	Easy-running tyre, alu rim, black	width 34 mm	149,00

Castor wheel 7" / 175 mm

☐ 182295	PU tyre softroll, plastic wheel rims, black	width 40 mm	0,00
---------------------------------	---	-------------	------

REAR SEAT HEIGHT **6**

Rear Seat height (mm) and drive wheel height (inches)

Adjustable in 12.5 mm increments with no extra mounting materials

Rear seat height		387,5	400	412,5	425	437,5	450	462,5	475	487,5	500	512,5	525	537,5
Drive wheel	22"	x	x	x	x	x	x	x	x	x				
	24"			x	x	x	x	x	x	x	x			
	26"						x	x	x	x	x	x	x	

The rear seat height must not be higher than the front seat height.

Note: The values shown are for reference only and are based on measurements taken at 0° seat tilt without a seat cushion.

Rear seat height

Rear seat height	387,5	400	412,5	425	437,5	450	462,5	475	487,5	500	512,5	525	537,5
Selection													
Item no.	181312	181313	181314	181315	181316	181317	181318	181319	181320	181321	181322	181323	181331

WARNING: The maximum permissible seat height difference between the front and rear seat height is 100 mm.

Item No.	Description	Price (€) excl. VAT
DRIVE WHEEL		
Drive wheels 22"		
☐ 181296	Standard rim, aluminum hub black, tangential spokes silver	0,00
☐ 181140	Design rim, aluminum hub, radial spokes, black	185,00
☐ 181143	Hollow chamber rim, aluminum hub, radial spokes, black	max. user weight 120 kg 215,00
☐ 181146	Standard rim, drum brake, aluminum hub, radial spokes, black	only with curved, height-adjustable push handles 347,00
Drive wheels 24"		
☐ 181297	Standard rim, aluminum hub black, tangential spokes silver	0,00
☐ 181141	Design rim, aluminum hub, radial spokes, black	185,00
☐ 181144	Hollow chamber rim, aluminum hub, radial spokes, black	max. user weight 120 kg 215,00
☐ 181336	Spinergy Spox rim, spokes 18 pcs., black	695,00
☐ 181335	Spinergy LX rim, spokes 12 pcs., black	max. user weight 120 kg 906,00
☐ 181147	Standard rim, drum brake, aluminum hub, radial spokes, black	only with curved, height-adjustable push handles 347,00
Not possible with one-hand drive		
Drive wheels 26"		
☐ 181298	Standard rim, aluminum hub black, tangential spokes silver	0,00
☐ 181142	Design rim, aluminum hub, radial spokes, black	185,00
☐ 181145	Hollow chamber rim, aluminum hub, radial spokes, black	max. user weight 120 kg 215,00
☐ 181148	Standard rim, drum brake, aluminum hub, radial spokes, black	only with curved, height-adjustable push handles 347,00
One-hand drive 24"		
☐ 181302	One-hand drive 24", drive wheels PU	left 995,00
☐ 181303	One-hand drive 24", drive wheels PU	right 995,00
☐ 181304	One-hand drive 24", drive wheels air tires, standard, black	left 995,00
☐ 181305	One-hand drive 24", drive wheels air tires, standard, black	right 995,00
Not possible in combination with caster angle 1°- 3° and drum brake and push rims TETRA-GRIPP, ERGO-GRIPP, CURVE L TETRA-GRIPP, GEKKO. Overall width with one hand drive = +40 mm. Recommended with one-hand brake.		
Tires		
☐ 181162	PU tires, fine tread, puncture-proof, black	not compatible with the hollow chamber rim 0,00
☐ 181163	Air tires, standard, black	0,00
☐ 181164	Air tires, Marathon Plus, including puncture protection, black	79,00
☐ 181165	Air tires, ultra-light, treadless, black	available only in 24" 69,00
Push rims		
☐ 181166	Push rims aluminum, black anodized	0,00
☐ 181167	Push rims steel, polished	0,00
☐ 181168	Push rims titanium	0,00
☐ 181306	24" TETRA-GRIPP push rims, black	Special coated push rims, full hand function with reduced hand strength or limited hand function 427,00
☐ 181169	24" CURVE L TETRA-GRIPP push rims, black	Special coated push rims with wide contact surface, full hand function with reduced hand strength or limited hand function 457,00
☐ 181307	24" ERGO-GRIPP push rims, black anodized	Ergonomic push rims with integrated rubber lip across the width, full hand function from full hand strength to reduced hand strength 427,00
☐ 181170	24"GEKKO push rims, black anodized	Ergonomic push rims with integrated rubber lip across the width, full hand function from full hand strength to reduced hand strength 457,00
Push rim mounting		
☐ 181223	Narrow mounting 10 mm	0,00
☐ 181224	Wide mounting 20 mm	0,00
Not possible in combination with one-hand drive.		

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------

DRIVE WHEEL

Pushrim cover

☐	181349	Pushrim cover smooth, silicon, black	pair	135,00
Not possible with special pushrims TETRA-GRIPP, CURVE L TETRA-GRIPP, ERGO-GRIPP and GEKKO.				

Spoke guard

☐	181225	Spoke guard, transparent	pair	190,00
Not possible with Spinergy SLX, LX and Spox rim.				

Camber

☐	181158	Camber 0°		0,00
☐	181159	Camber 1°	not possible with drum brake	0,00
☐	181160	Camber 2°	not possible with drum brake	0,00
☐	181161	Camber 3°	not possible with drum brake	0,00

The camber angles of 2° and 3° are not selectable in combination with the rear wheel position +40 mm and +30 mm.

Overall width with Camber 1° = +20 mm / 2° = +40 mm / 3° = +60 mm


Position of drive wheels

Position of drive wheel: +20 (rear) to -60 mm relative to the front of the back tub

☐	181157	+40 mm with wheelbase extension		0,00
☐	181222	+30 mm with wheelbase extension		0,00
☐	181149	+ 20 mm		0,00
☐	181221	+ 10 mm		0,00
☐	181150	0 mm		0,00
☐	181151	- 10 mm		0,00
☐	181152	- 20 mm		0,00
☐	181153	- 30 mm		0,00
☐	181154	- 40 mm	not possible with seat depth 360 mm Anti-tip wheels recommended	0,00
☐	181155	- 50 mm	not possible with seat depth 360 mm Anti-tip wheels recommended	0,00
☐	181156	- 60 mm	not possible with seat depth 360 mm Anti-tip wheels recommended	0,00

The rear wheel position +40 mm and +30 mm is not selectable in combination with camber angles of 2° and 3°.

The drive wheel positions -50/-60 are not compatible with the adjustable back tube angle (-10° to +30°).

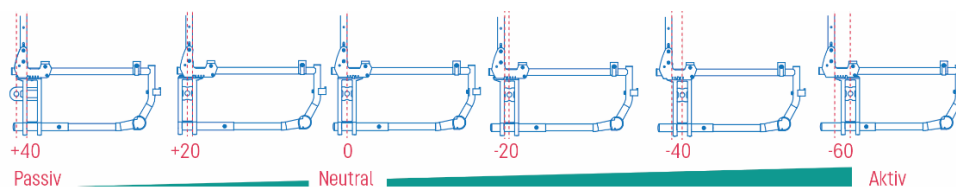

FRAME ACCESSORIES

☐	181226	Long pelvic belt (length 1200 mm)		35,00
☐	181227	Long pelvic belt (length 1500 mm)		38,00
☐	181308	Hemi Kit, Spacer Block: Steering wheels 30mm exposed for more foot clearance		367,00
☐	181171	Anti-tipping, swivel-off wheel	left	169,00
☐	181172	Anti-tipping, swivel-off wheel	right	169,00
☐	181173	Foot tube	left	63,00
☐	181174	Foot tube	right	63,00
☐	181294	Cane holder (only in conjunction with foot tube)	left	39,00
☐	181295	Cane holder (only in conjunction with foot tube)	right	39,00

The anti-tip wheel and the foot tube cannot be mounted on the same side.

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------

SEAT

☐	181202	seat upholstery incl. utility bag	bag dimensions:(L x W x H: 220 x 120 x 30 mm)	0,00
☐	181203	Without seat upholstery		0,00

Seat cushion

☐	181228	Wheelchair cushion standard	height 60 mm	99,00
--------------------------	--------	-----------------------------	--------------	-------

Anti-decubitus seat cushion Vicair Active O2

Seat width (mm) selection with seat depth (mm)

- ☒ Standard sizes / height: 60 oder 90 mm
- ☒ Custom sizes / prices and delivery times upon request
- ☒ Standard sizes / height: 90 mm

Seat width		340	360	380	400	420	440	460	480	500	520
Seat depth	360	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	380	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	400	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	420	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	440	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	460	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	480	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	500	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	520	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	540	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

☐	181332	Vicair Active O2 cushion height 60 mm	HMV 11.39.05.1009	750,00
☐	181333	Vicair Active O2 cushion height 90 mm	HMV 11.39.05.1008	750,00

BACKREST 3

Back height

☐	181175	320 mm	+ 40 mm adjustable	not with lumbar bend	0,00
☐	181176	340 mm	± 20 mm adjustable	not with lumbar bend	0,00
☐	181177	360 mm	± 20 mm adjustable	with lumbar bend, not adjustable by +/- 20 mm	0,00
☐	181178	380 mm	± 20 mm adjustable	with lumbar bend, not adjustable by +/- 20 mm	0,00
☐	181179	400 mm	± 20 mm adjustable		0,00
☐	181180	420 mm	± 20 mm adjustable		0,00
☐	181181	440 mm	± 20 mm adjustable		0,00
☐	181182	460 mm	± 20 mm adjustable		0,00
☐	181183	480 mm	± 20 mm adjustable		0,00
☐	181184	500 mm	- 40 mm adjustable		0,00

Back height adjustment (+40 mm, ± 20 mm, -40 mm) is not available with curved push handles or curved, height-adjustable push handles.

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------

BACKREST 3

Back tube

☐	181188	Straight	0,00
☐	181189	Lumbar bend (+7,5°)	can be selected from a back height of 360 mm 78,00

Back angle

☐	181339	Fixed angle 0°, not angle-adjustable	measured at 90° to the seat angle 0,00
☐	181190	Fixed angle -10°, angle-adjustable	measured to the seat angle 287,00
☐	181191	Fixed angle -5°, angle-adjustable	measured to the seat angle 287,00
☐	181192	Fixed angle 0°, angle-adjustable	measured to the seat angle 287,00
☐	181193	Fixed angle +5°, angle-adjustable	measured to the seat angle 287,00
☐	181194	Fixed angle +10°, angle-adjustable	measured to the seat angle 287,00
☐	181195	Self-adjustable backrest, -10° bis +30°	measured vertically to the ground in 10° increments 335,00

Please note: limited foldability at -10°

0° corresponds to an angle of 90°. Negative angles are < 90°, and positive angles are > 90°. The self-adjustable backrest (-10° to +30°) is not compatible with the swing-away clothing guard. Recommendation: From an angle of +10°, use with anti-tip wheels.

Back upholstery

☐	181196	Adjustable, breathable back upholstery with integrated pocket (W x H: 260 x 220 mm), black	0,00
☐	181229	Back upholstery increased by 20 mm in width , breathable back upholstery with integrated pocket (W x H: 260 x 220 mm), black	0,00 not compatible with SW 620 mm
☐	181230	Back upholstery increased by 40 mm in width , breathable back upholstery with integrated pocket (W x H: 260 x 220 mm), black	0,00 not compatible with SW 600 und 620 mm
☐	181197	Without back upholstery	0,00


Stabilizer bar

☐	181324	Stabilizer bar, foldable	available from seat width 420 mm 133,00
--------------------------	--------	--------------------------	--

Push handles

☐	181198	Push handles standard	not compatible with drum brake 0,00
☐	181199	Push handles folding	not compatible with drum brake 179,00
☐	181231	Push handles curved	0,00
☐	181200	Push handles curved, height-adjustable (+100 mm)	not with lumbar bend 283,00


Back height adjustment (+40, ± 20 mm, -40 mm) is not available with curved push handles or curved, height-adjustable push handles.




Push handles
standard



Push handles
folding



Push handles curved



Push handles curved,
height-adjustable

SPEX ZYGO BACK SYSTEM

Spex Zygo back system, aluminum back shell with quick release

Spex Zygo width (mm) / wheelchair seat width (mm) to backrest height (mm)

The adjustment ranges of the quick release holder:

Seat depth: 50 mm

Back width: 20 mm (per side)

Back angle: +10° / -10°

Note: Please note that selecting a Spex Zygo backrest system may require adjustment of seat depth.

Spex Zygo Active Lo



Standard sizes



Special sizes / prices and delivery times on request



Spex Zygo Deep Lo

		Contour Active and Deep / backrest height Lo			
Spex Zygo width		360	410	460	510
Wheelchair SW + Spex Active contour		340 / 360	380 / 400 / 420	440 / 460	480 / 500 / 520
Wheelchair SW + Spex Deep contour		360 / 380	400 / 420 / 440	460 / 480 / 500	520
Backrest height	200 mm	x			
	230 mm		x	x	
	280 mm				x

Zygo Spex Active Lo, shallow contour and short backrest height

☐	170297	Spex Zygo Active Lo	Width: 360 x height 200 mm, contour 60 mm	1.057,00
☐	170298	Spex Zygo Active Lo	Width: 410 x height 230 mm, contour 65 mm	1.057,00
☐	170299	Spex Zygo Active Lo	Width: 460 x height 230 mm, contour 70 mm	1.057,00
☐	170300	Spex Zygo Active Lo	Width: 510 x height 280 mm, contour 85 mm	on request

Zygo Spex Deep Lo, deep contour and short backrest height

☐	170302	Spex Zygo Deep Lo	Width: 360 x height 200 mm, contour 115 mm	1.057,00
☐	170303	Spex Zygo Deep Lo	Width: 410 x height 230 mm, contour 150 mm	1.057,00
☐	170304	Spex Zygo Deep Lo	Width: 460 x height 230 mm, contour 160 mm	1.057,00
☐	170305	Spex Zygo Deep Lo	Width: 510 x height 280 mm, contour 160 mm	on request



Spex Zygo Active Mid

		Contour Active / backrest height Mid			
Spex Zygo width		360	410	460	510
Wheelchair seat width		340 / 360	380 / 400 / 420	440 / 460	480 / 500 / 520
Backrest height	360 mm		x		
	380 mm	x		x	x
	410 mm		x		
	430 mm		x	x	
	460 mm				x

Zygo Spex Active Mid, shallow contour and high backrest height

☐	170306	Spex Zygo Active Mid	Width: 360 x height 380 mm, contour 55 mm	1.057,00
☐	170307	Spex Zygo Active Mid	Width: 410 x height 360 mm, contour 65 mm	1.057,00
☐	170308	Spex Zygo Active Mid	Width: 410 x height 410 mm, contour 65 mm	1.057,00
☐	170309	Spex Zygo Active Mid	Width: 410 x height 430 mm, contour 65 mm	1.057,00
☐	170310	Spex Zygo Active Mid	Width: 460 x height 380 mm, contour 75 mm	1.057,00
☐	170311	Spex Zygo Active Mid	Width: 460 x height 430 mm, contour 75 mm	1.057,00
☐	170342	Spex Zygo Active Mid	Width: 510 x height 380 mm, contour 85 mm	on request
☐	170343	Spex Zygo Active Mid	Width: 510 x height 460 mm, contour 85 mm	on request

SPEX ZYGO BACK SYSTEM



Spex Zygo Deep Mid

		Contour Deep / backrest height Mid			
Spex Zygo width		360	410	460	510
Wheelchair seat width		340 / 360	380 / 400 / 420	440 / 460	480 / 500 / 520
Backrest height	360 mm		x		
	380 mm			x	x
	410 mm	x	x		
	430 mm		x		x
	460 mm			x	

Zygo Spex Deep Mid, deep contour and high backrest height

☐	170312	Spex Zygo Deep Mid	Width: 360 x height 410 mm, contour 120 mm	1.057,00
☐	170313	Spex Zygo Deep Mid	Width: 410 x height 360 mm, contour 130 mm	1.057,00
☐	170314	Spex Zygo Deep Mid	Width: 410 x height 410 mm, contour 130 mm	1.057,00
☐	170315	Spex Zygo Deep Mid	Width: 410 x height 430 mm, contour 150 mm	1.057,00
☐	170316	Spex Zygo Deep Mid	Width: 460 x height 380 mm, contour 145 mm	1.057,00
☐	170317	Spex Zygo Deep Mid	Width: 460 x height 460 mm, contour 150 mm	1.057,00
☐	170347	Spex Zygo Deep Mid	Width: 510 x height 380 mm, contour 160 mm	on request
☐	170348	Spex Zygo Deep Mid	Width: 510 x height 460 mm, contour 160 mm	on request

Additional products can be ordered via a separate order form.

Push handles

☐	181198	Push handles standard	not compatible with drum brake	0,00
☐	181199	Push handles folding	not compatible with drum brake	179,00
☐	181231	Push handles curved		0,00
☐	181200	Push handles curved, height-adjustable (+100 mm)	not with lumbar bend	283,00
☐	181201	Without push handles		0,00

Headrests

☐	170349	Spex headrest, Stylo 160	4-way adjustable (horizontal, height, lateral position, and angle)	605,00
☐	170350	Spex headrest, Stylo 260, extended	4-way adjustable (horizontal, height, lateral position, and angle)	725,00



Spex headrest, Stylo 160



Spex headrest, Stylo 260

Headrest cushion

☐	170351	Spex head support pad, Circle 150	inner (w) 145 mm, contour 50 mm	263,00
☐	170352	Spex head support pad, Comfort 250	inner (w) 235 mm, contour 65 mm	263,00



Spex head support pad, Circle 150



Spexhead support pad, Comfort 250

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------


SIDE PANEL

☐	181205	Side panel with aluminum wheel cover incl. cold protection, fixed mount	95,00
☐	181206	Side panel with aluminum wheel cover incl. cold protection, fixed mount, height-adjustable armrests (PU)	217,00
☐	181207	Side panel with aluminum wheel cover incl. cold protection, swing-away to the rear and removable, height-adjustable armrests (PU)	340,00
☐	181208	Side panel with aluminum wheel cover incl. cold protection, plug-in	164,00
☐	181209	Side panel with aluminum wheel cover incl. cold protection, plug-in, height-adjustable armrests (PU)	286,00


Overall width with side panel, swing-away = +50 mm. Overall width with fixed or plug-in side panel with armrests = +40 mm.

The swing-away and removable side panel is not compatible with the adjustable back tube angle (-10° to +30°).


The plug-in side panel is not compatible with the parking brake, one-hand operation.




Side panel solid,
aluminium




Side panel solid,
aluminium,
arm rests (PU)



Side panel, aluminium, swing
away and removable, arm
rests (PU)



Side panel plug-in,
aluminium,



Side panel plug-in,
aluminium,
arm rests (PU)

Colour side panel

☐	181210	Black	0,00		
☐	181211	Distant Blue	0,00		
☐	181212	Alga Green	0,00		
☐	181213	Ruby Red	0,00		
☐	181214	Neon Orange	0,00		
☐	181285	Side panel in your colour of choice	RAL colour		278,00



Black



Distant Blue



Alga Green



Ruby Red



Neon Orange



RAL color of choice

ACCESSORIES WHEEL GUARDS

☐	181215	Armrest standard, continuously depth-adjustable, PU black	(L x B) 255 x 51 mm	0,00
☐	181216	Armrest, depth-adjustable in 3 steps from 34 mm (tool-free), PU black	(L x B) 255 x 51 mm	120,00
☐	181274	HEMI arm pads, handpiece flat left, PU, 360° rotatable	(L) 465 mm	436,00
☐	181275	HEMI arm pads, handpiece flat right, PU, 360° rotatable	(L) 465 mm	436,00
☐	181276	HEMI arm pads, handpiece ergonomic left, PU, 360° rotatable	(L) 477 mm	464,00
☐	181277	HEMI arm pads, handpiece ergonomic right, PU, 360° rotatable	(L) 477 mm	464,00
☐	181278	Extension PU, forearm shell	(L) 70 mm	80,00



HEMI armrest, handpiece flat



HEMI armrest, handpiece ergonomic



Extension

☐	181270	Therapy tray, up to SW 400 - 460 mm	W x D: 600 x 570 mm	270,00
☐	181271	Therapy tray, SW 480 - 540 mm,	W x D: 675 x 570	291,00
☐	181266	Therapy table, half table folding	left	243,00
☐	181272	Therapy table, half table folding	right	243,00

Not possible with the side panel without armrests, detachable side panel, and HEMI arm pads

Item No.	Description	Price (€) excl. VAT
----------	-------------	---------------------


LEG SUPPORT **4 7**

Leg Support Hangers

Frame angle and length of lower leg (III)

☐ 181217	Leg support hangers, frame angle open, alu/plastic, pair	Frame angle (knee angle 110°-115°), UI 370 – 510 mm	0,00
☐ 181279	Leg support hangers, frame angle comfort, alu, pair	Frame angle (knee angle 100°-105°), UI 370 – 510 mm	154,00
☐ 181280	Leg support hangers, frame angle closed, alu, Pair	Frame angle (knee angle 90°-95°), UI 370 – 510 mm	154,00

The lower leg lengths 330 to 470 mm and 290 to 390 mm cannot be selected for the open leg support. The upper parts of the leg supports cannot be combined with frame type F with fixed leg supports. Leg supports with a closed frame angle cannot be combined with 6" or 7" castor wheels.



Leg support open



Leg support comfort



Leg support, closed


Lower leg support length

☐ 182297	Standard lower leg length 370 – 510 mm		0,00
☐ 181326	Shortened lower leg length 330 – 470 mm	not possible with the leg support, frame angle open	0,00
☐ 181327	Shortened lower leg length 290 – 390 mm	not possible with frame type F, fixed leg supports and with the leg support, frame angle open	0,00


Foot plates

☐ 181218	Foot plates, divided, plastik black, pair	fold-up design, adjustable angle, with heel strap	0,00
☐ 181219	Foot plates, divided, aluminium black, pair	fold-up design, adjustable angle, with heel strap	171,00
☐ 181267	Foot plates, continuous, aluminium black	left fold-up design, adjustable angle, with calf strap	210,00
☐ 181268	Foot plates, continuous, aluminium black	right fold-up design, adjustable angle, with calf strap	210,00


Split footplates (plastic) not compatible with frame type F with 30 mm frame recess, in seat widths 380 - 420 mm.



Foot plates, divided, plastic, fold-up design



Foot plates, divided, alu, fold-up design




Foot plates, continuous, alu, fold-up design

Elevating legrest and amputees support

☐ 181281	Elevating legrest, adjustable horizontally with gas spring	right	197,00
☐ 181282	Elevating legrest, adjustable horizontally with gas spring	left	197,00
☐ 181283	Amputees support, adjustable angle	right	187,00
☐ 181284	Amputees support, adjustable angle	left	187,00

Not possible with frame type F, frames with fixed leg support



Leg support, adjustable horizontally



Leg support for amputees

BRAKE

☐ 182218	Parking brake standard, push-to-lock	pair	0,00
☐ 182216	Parking brake, pull-to-lock	pair	49,00
☐ 181287	One-hand brake system, incl. 110 mm fold-out brake lever extension	right	272,00
☐ 181286	One-hand brake system, incl. 110 mm fold-out brake lever extension	left	272,00
☐ 181288	Brake lever extension, 110 mm fold-out	pair	49,00



Productgroup: adaptive wheelchair
Product: AS[advanced]

DIETZ GmbH
Reutäckerstraße 12
76307 Karlsbad
info@dietz-group.de
www.dietz-group.de